

Termoresistenza PT 100 (range - 70°C / + 500°C)

PT 100 resistance thermometer (operating range - 70°C / + 500°C)




Tolleranze dimensionali +/- 3% - Dimensional tolerances +/- 3%





SETER®

SETER s.r.l. Fiorano Modenese Modena Italy
commerciale@seter.it www.seter.it
tel. 0536-843454 fax 0536-927199

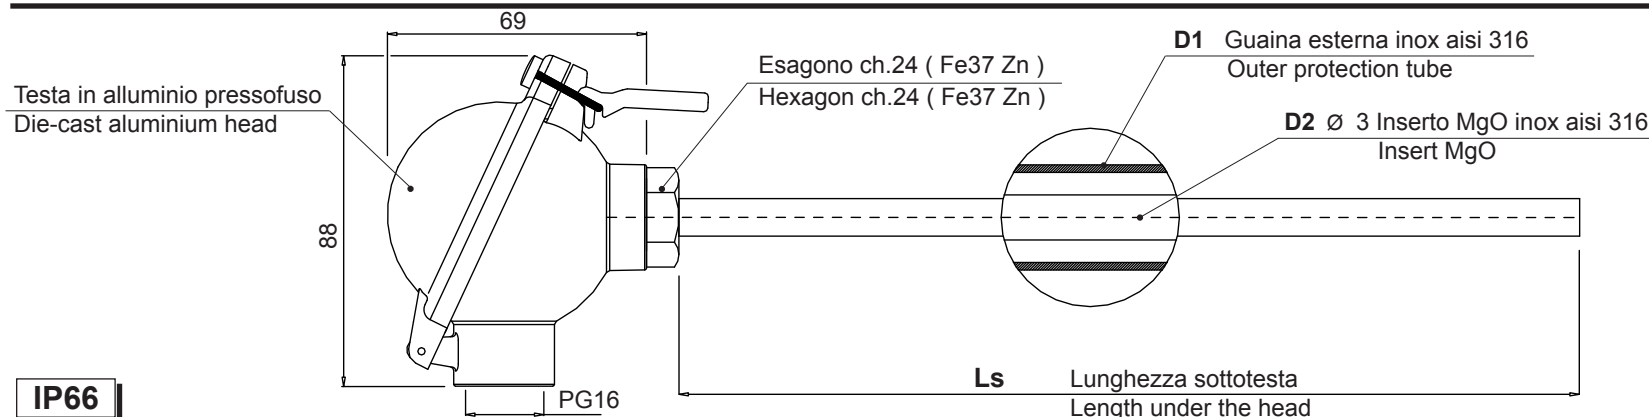

IP66

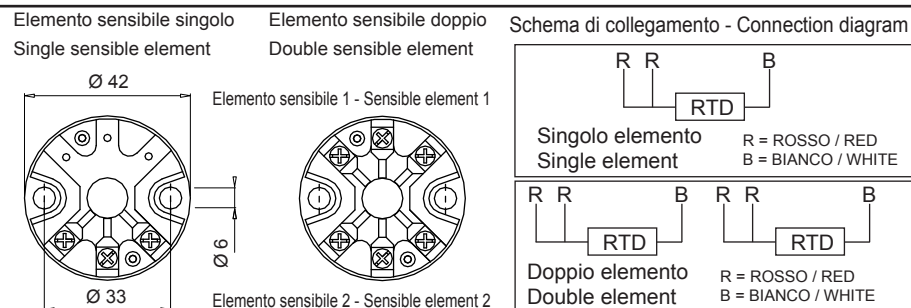

Optional	Filetto F Thread	1/4" gas (Fe37 Zn)	3/8" gas (Fe37 Zn)	1/2" gas (Fe37 Zn)	1/2" gas (Aisi 303)
	Ls	Ø 6	●	●	●
		Ø 8	●	●	●
		Ø 10	—	●	●
		Ø 12	—	●	●
		Ø 14	—	●	●
		Ø 17.2	—	—	—
Versione con filetto sottotesta Version with thread under head		Ø 20	—	—	—
		TA1480	TA1520	TA1560	TI1560

Esempio di ordine: Cod. **R0100.071.0808 + TA1480** termoresistenza PT100 in classe "B", singolo elemento, guaina esterna Ø 8 mm, lunghezza sottotesta 400 mm + opt. filetto 1/4" gas
Ordering example: Cod. **R0100.071.0808 + TA1480** Class "B" PT100 resistance thermometer, single element, outside sheath Ø 8 mm, length under the head 400 mm + opt. filetto 1/4" gas

La termoresistenza viene fornita priva di pressacavo (PG16).
The resistance thermometer is supplied without core hitch (PG16).

Inserimento minimo 40 mm.
Minimum insertion 40 mm.

Diametro guaina esterna D1 (mm)
Outer protection tube diameter

Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 17.2	Ø 20
06	08	10	12	14	17	20

Elemento
Element

Singolo (3 fili) Single	Doppio (6 fili) Double
1	2

Tolleranza elemento sensibile (IEC751)
Tolerance of sensitive element

Classe A Class A (+/- 0,15°C a 0°C)	Classe B Class B (+/- 0,30°C a 0°C)
3	0

Lunghezza Ls
Length

Lunghezza Ls Length	
01	50 mm
02	100 mm
03	150 mm
04	200 mm
05	250 mm
06	300 mm
07	350 mm
08	400 mm
09	450 mm
10	500 mm
11	550 mm
12	600 mm
13	650 mm
14	700 mm
15	750 mm
16	800 mm
17	850 mm
18	900 mm
19	950 mm
20	1000 mm
22	1100 mm
24	1200 mm
26	1300 mm
28	1400 mm
30	1500 mm
32	1600 mm
34	1700 mm
36	1800 mm
38	1900 mm
40	2000 mm
42	2100 mm
44	2200 mm
46	2300 mm
48	2400 mm
50	2500 mm
52	2600 mm
54	2700 mm
56	2800 mm
58	2900 mm
60	3000 mm

R 0 1 0 0 . 7 .

Tutte le quote sono espresse in mm
All dimensions are in millimeters

SETER s.r.l. Data: 01-08-2011 Revisione n°: 07 del 02-01-2017 Disegnato: 001 Approvato: 004