


Inserto estraibile ad isolamento minerale (MgO) Mineral insulated (MgO) removable insert



Tolleranza termoelemento secondo la norma CEI EN 60584-1 Classe 1
Tolerances thermoelement according to CEI EN 60584-1 Class 1
Tolleranze dimensionali +/- 3% - Dimensional tolerances +/- 3%

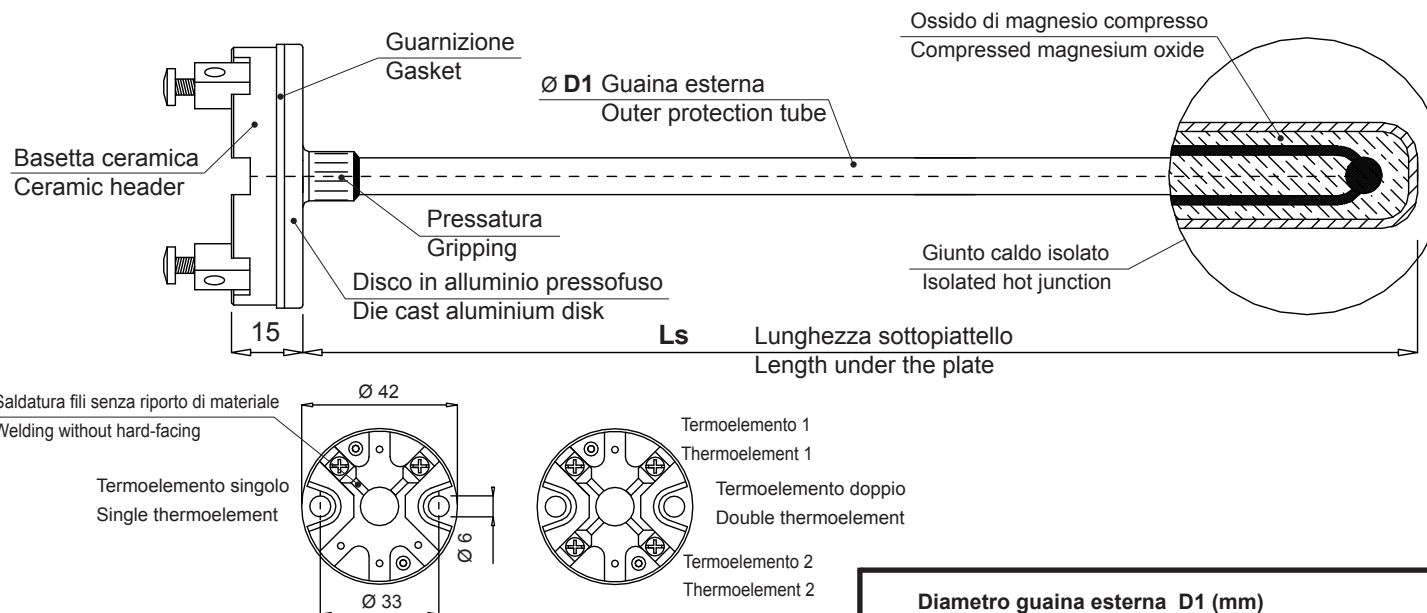

Massime temperature di lavoro consigliate °C
Advised maximum operating temperatures °C

Ø D1	Singolo elemento Single element							Doppio elemento Double element			
	Ø 1	Ø 1.5	Ø 2	Ø 3	Ø 4.5	Ø 6	Ø 8	Ø 3	Ø 4.5	Ø 6	Ø 8
J (Fe-Co)	650	690	730	750	760	770	770	690	730	760	770
K (NiCr-Ni)	820	860	890	950	970	1080	1100	860	890	970	1080
N (Nicrosil-Nisil)	900	950	990	1020	1090	1100	1100	950	990	1090	1100

Diametro guaina esterna D1 (mm)
Outer protection tube diameter

1 (mm)	1.5 (mm)	2 (mm)	3 (mm)	4.5 (mm)	6 (mm)	8 (mm)
10	15	20	30	45	60	80

Termoelemento
Thermoelement

Singolo (2 fili) Single	Doppio (4 fili)* Double
1	2

* Disponibile solo Ø 3, Ø 4.5, Ø 6, Ø 8
Available only

Tipo termocoppia
Thermocouple type

J (Fe-Co)	K (NiCr-Ni)	N (Nicrosil-Nisil)
Guaina Protection tube (Inox aisi 316)	Guaina Protection tube (Inconel 600)	Guaina Protection tube (Inconel 600)
1	2	3

Lunghezza Ls / Length

01	80 mm	41	2080 mm
02	130 mm	42	2130 mm
03	180 mm	43	2180 mm
04	230 mm	44	2230 mm
05	280 mm	45	2280 mm
06	330 mm	46	2330 mm
07	380 mm	47	2380 mm
08	430 mm	48	2430 mm
09	480 mm	49	2480 mm
10	530 mm	50	2530 mm
11	580 mm	51	2580 mm
12	630 mm	52	2630 mm
13	680 mm	53	2680 mm
14	730 mm	54	2730 mm
15	780 mm	55	2780 mm
16	830 mm	56	2830 mm
17	880 mm	57	2880 mm
18	930 mm	58	2930 mm
19	980 mm	59	2980 mm
20	1030 mm	60	3030 mm
21	1080 mm	62	3130 mm
22	1130 mm	64	3230 mm
23	1180 mm	66	3330 mm
24	1230 mm	68	3430 mm
25	1280 mm	70	3530 mm
26	1330 mm	72	3630 mm
27	1380 mm	74	3730 mm
28	1430 mm	76	3830 mm
29	1480 mm	78	3930 mm
30	1530 mm	80	4030 mm
31	1580 mm	82	4130 mm
32	1630 mm	84	4230 mm
33	1680 mm	86	4330 mm
34	1730 mm	88	4430 mm
35	1780 mm	90	4530 mm
36	1830 mm	92	4630 mm
37	1880 mm	94	4730 mm
38	1930 mm	96	4830 mm
39	1980 mm	98	4930 mm
40	2030 mm	99	5030 mm



Tutte le quote sono espresse in mm
All dimensions are in millimeters

SETER s.r.l. Data: 20-01-2014 Revisione n°: 05 del 02-01-2017 Disegnato: 001 Approvato: 004

SETER®

SETER s.r.l. Fiorano Modenese Modena Italy
commerciale@seter.it www.seter.it
tel. 0536-843454 fax 0536-927199

T 6 0 5 0 . 0