


Inserto con foro di ispezione ø 5 mm per prove SAT (System Accuracy Test), idoneo per verifiche NADCAP, CQI-9 e AMS 2750 E (Aerospace Material Specification)

Insert with ø 5 mm inspection hole for SAT (System Accuracy Test), suitable for NADCAP, CQI-9 and AMS 2750 E (Aerospace Material Specification) tests



Tolleranza termoelemento secondo la norma CEI EN 60584-1 Classe 1
Tolerances thermoelement according to CEI EN 60584-1 Class 1
Tolleranze dimensionali +/- 3% - Dimensional tolerances +/- 3%

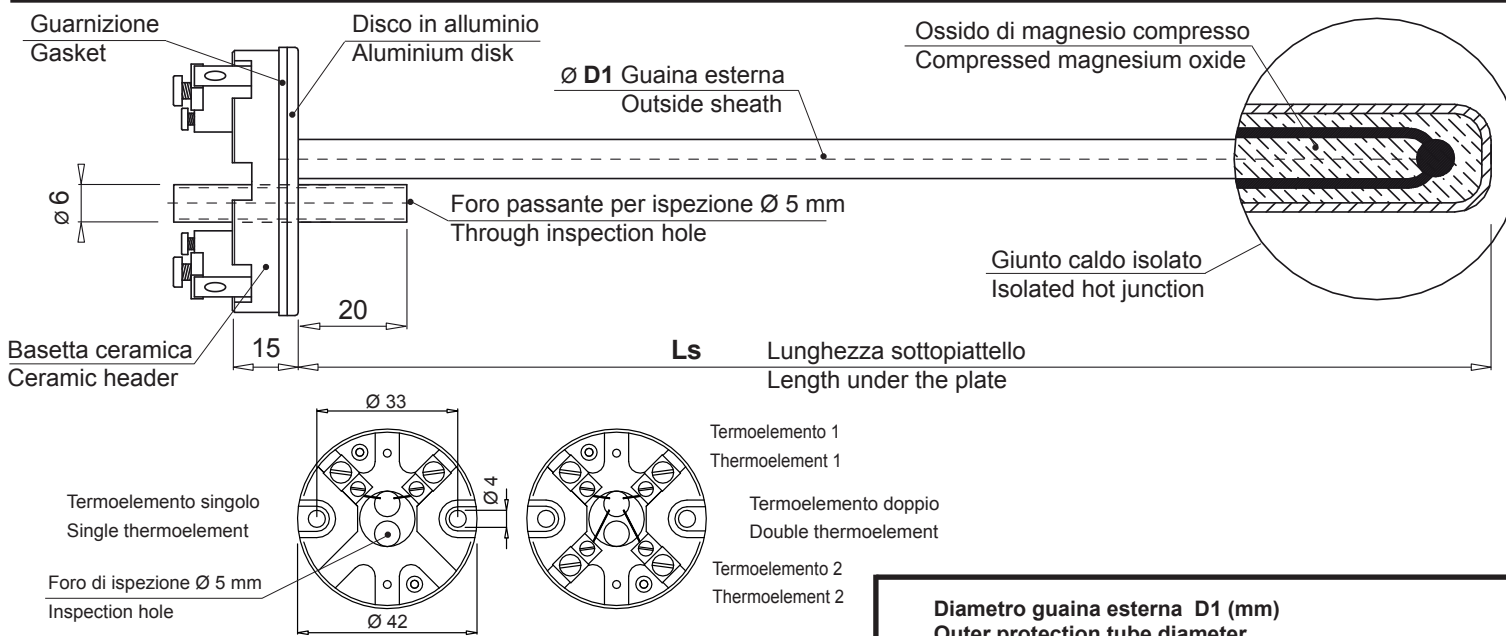

Massime temperature di lavoro consigliate °C
Advised maximum operating temperatures °C

Ø D1	Singolo elemento Single element						Doppio elemento Double element		
	Ø 1	Ø 1.5	Ø 2	Ø 3	Ø 4.5	Ø 6	Ø 3	Ø 4.5	Ø 6
J (Fe-Co)	650	690	730	750	760	770	690	730	760
K (NiCr-Ni)	820	860	890	950	970	1080	860	890	970
N (Nicrosil-Nisil)	900	950	990	1020	1090	1100	950	990	1090

Diametro guaina esterna D1 (mm)
Outer protection tube diameter

1 (mm)	1.5 (mm)	2 (mm)	3 (mm)	4.5 (mm)	6 (mm)
10	15	20	30	45	60

Termoelemento
Thermoelement

Singolo (2 fili) Single	Doppio (4 fili)* Double
1	2

* Disponibile solo Ø 3, Ø 4.5, Ø 6
Available only

Tipo termocoppia
Thermocouple type

J (Fe-Co)	K (NiCr-Ni)	N (Nicrosil-Nisil)
Guaina Protection tube (Inox aisi 316)	Guaina Protection tube (Inconel 600)	Guaina Protection tube (Inconel 600)
1	2	3

Lunghezza Ls / Length

01	70 mm	41	2070 mm
02	120 mm	42	2120 mm
03	170 mm	43	2170 mm
04	220 mm	44	2220 mm
05	270 mm	45	2270 mm
06	320 mm	46	2320 mm
07	370 mm	47	2370 mm
08	420 mm	48	2420 mm
09	470 mm	49	2470 mm
10	520 mm	50	2520 mm
11	570 mm	51	2570 mm
12	620 mm	52	2620 mm
13	670 mm	53	2670 mm
14	720 mm	54	2720 mm
15	770 mm	55	2770 mm
16	820 mm	56	2820 mm
17	870 mm	57	2870 mm
18	920 mm	58	2920 mm
19	970 mm	59	2970 mm
20	1020 mm	60	3020 mm
21	1070 mm	62	3120 mm
22	1120 mm	64	3220 mm
23	1170 mm	66	3320 mm
24	1220 mm	68	3420 mm
25	1270 mm	70	3520 mm
26	1320 mm	72	3620 mm
27	1370 mm	74	3720 mm
28	1420 mm	76	3820 mm
29	1470 mm	78	3920 mm
30	1520 mm	80	4020 mm
31	1570 mm	82	4120 mm
32	1620 mm	84	4220 mm
33	1670 mm	86	4320 mm
34	1720 mm	88	4420 mm
35	1770 mm	90	4520 mm
36	1820 mm	92	4620 mm
37	1870 mm	94	4720 mm
38	1920 mm	96	4820 mm
39	1970 mm	98	4920 mm
40	2020 mm	99	5020 mm

Tutte le quote sono espresse in mm
All dimensions are in millimeters

SETER s.r.l. Data: 03-01-2013 Revisione n°: 04 del 02-01-2017 Disegnato: 001 Approvato: 004

SETER®

SETER s.r.l. Fiorano Modenese Modena Italy
commerciale@seter.it www.seter.it
tel. 0536-843454 fax 0536-927199

T 6 0 7 0 . 0 .